Cotton
Laminate

PRIVA LAMINATES LLP
Survey No. 44/1/3/2,
Near Affil Vitrified,
8-A, National Highway,
At. Pipli Village,
Morbi-363 642

privalaminates@gmail.com

www.privalam.com

Cotton
Laminate

Cotton
Laminate

Inner **Strength** With **Fabric** Texture

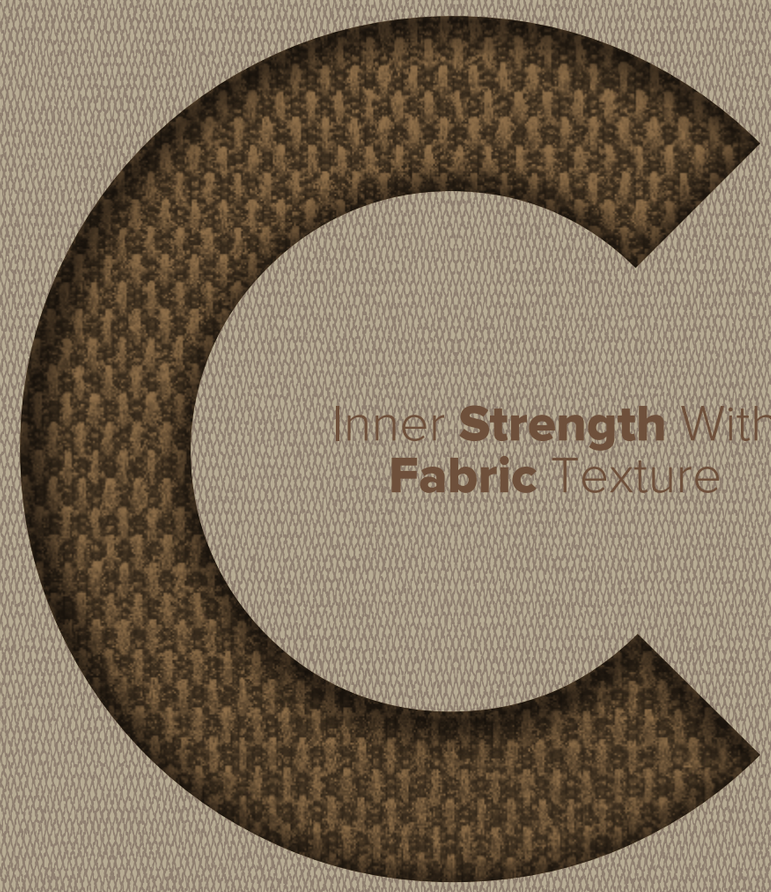

Fabric Collection

Cotton
Laminate

Fabrique

Inner **Strength** With **Fabric** Texture

Inspire By

NATURE

Cotton
Laminate

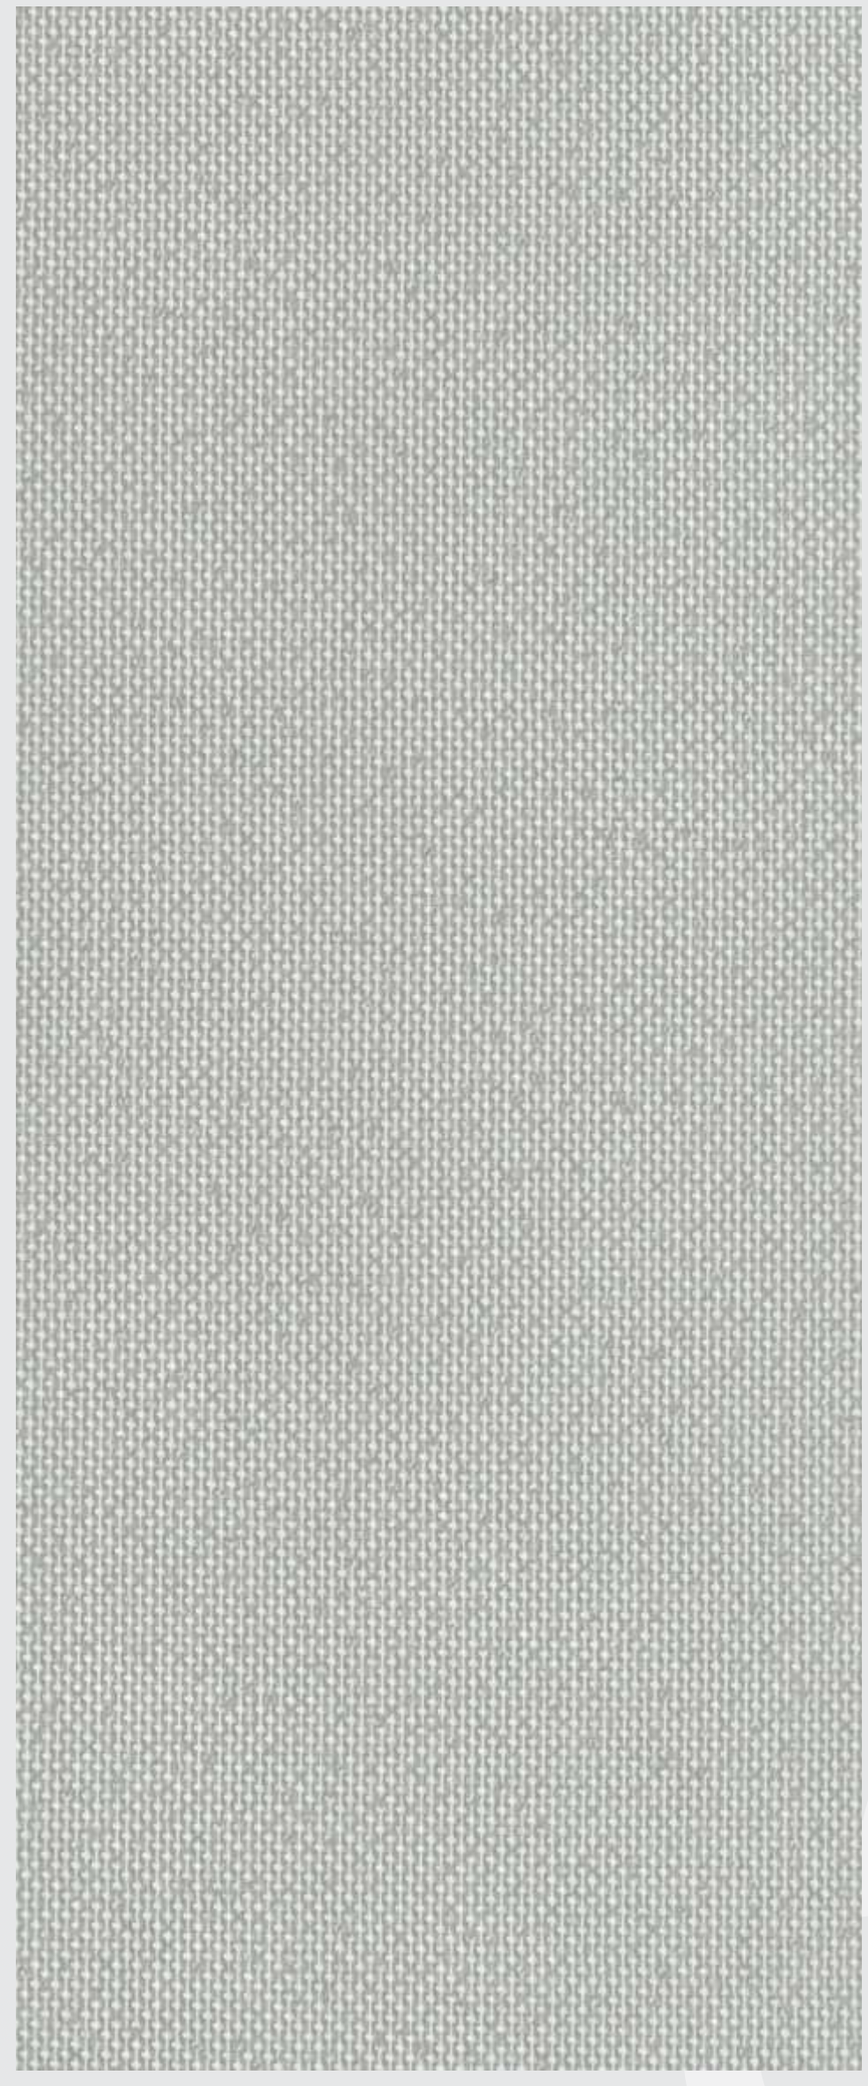

SF-338

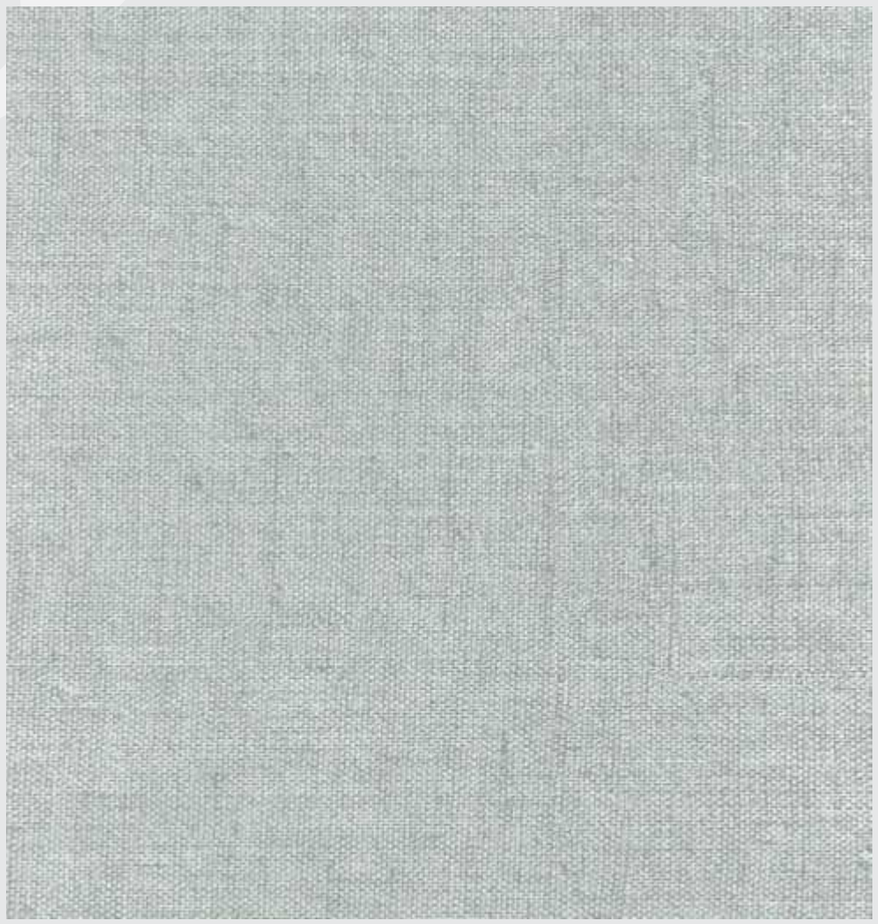

SF-304

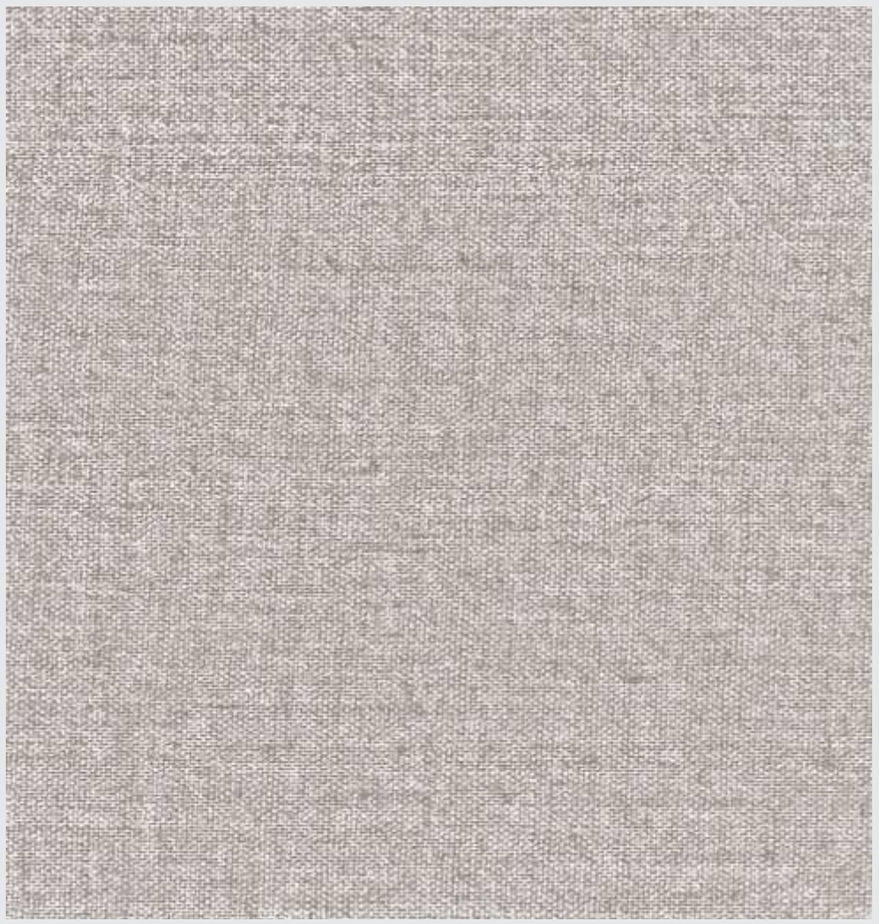

SF-306

SF-305

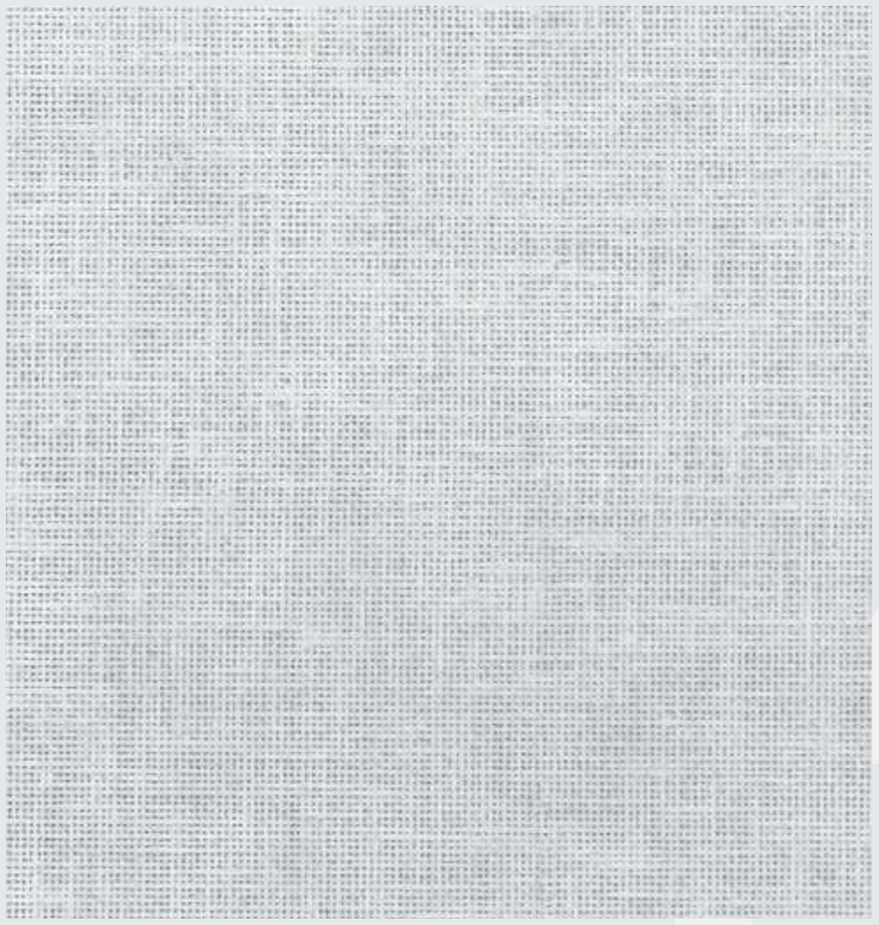

SF-307

SF-334

SF-309

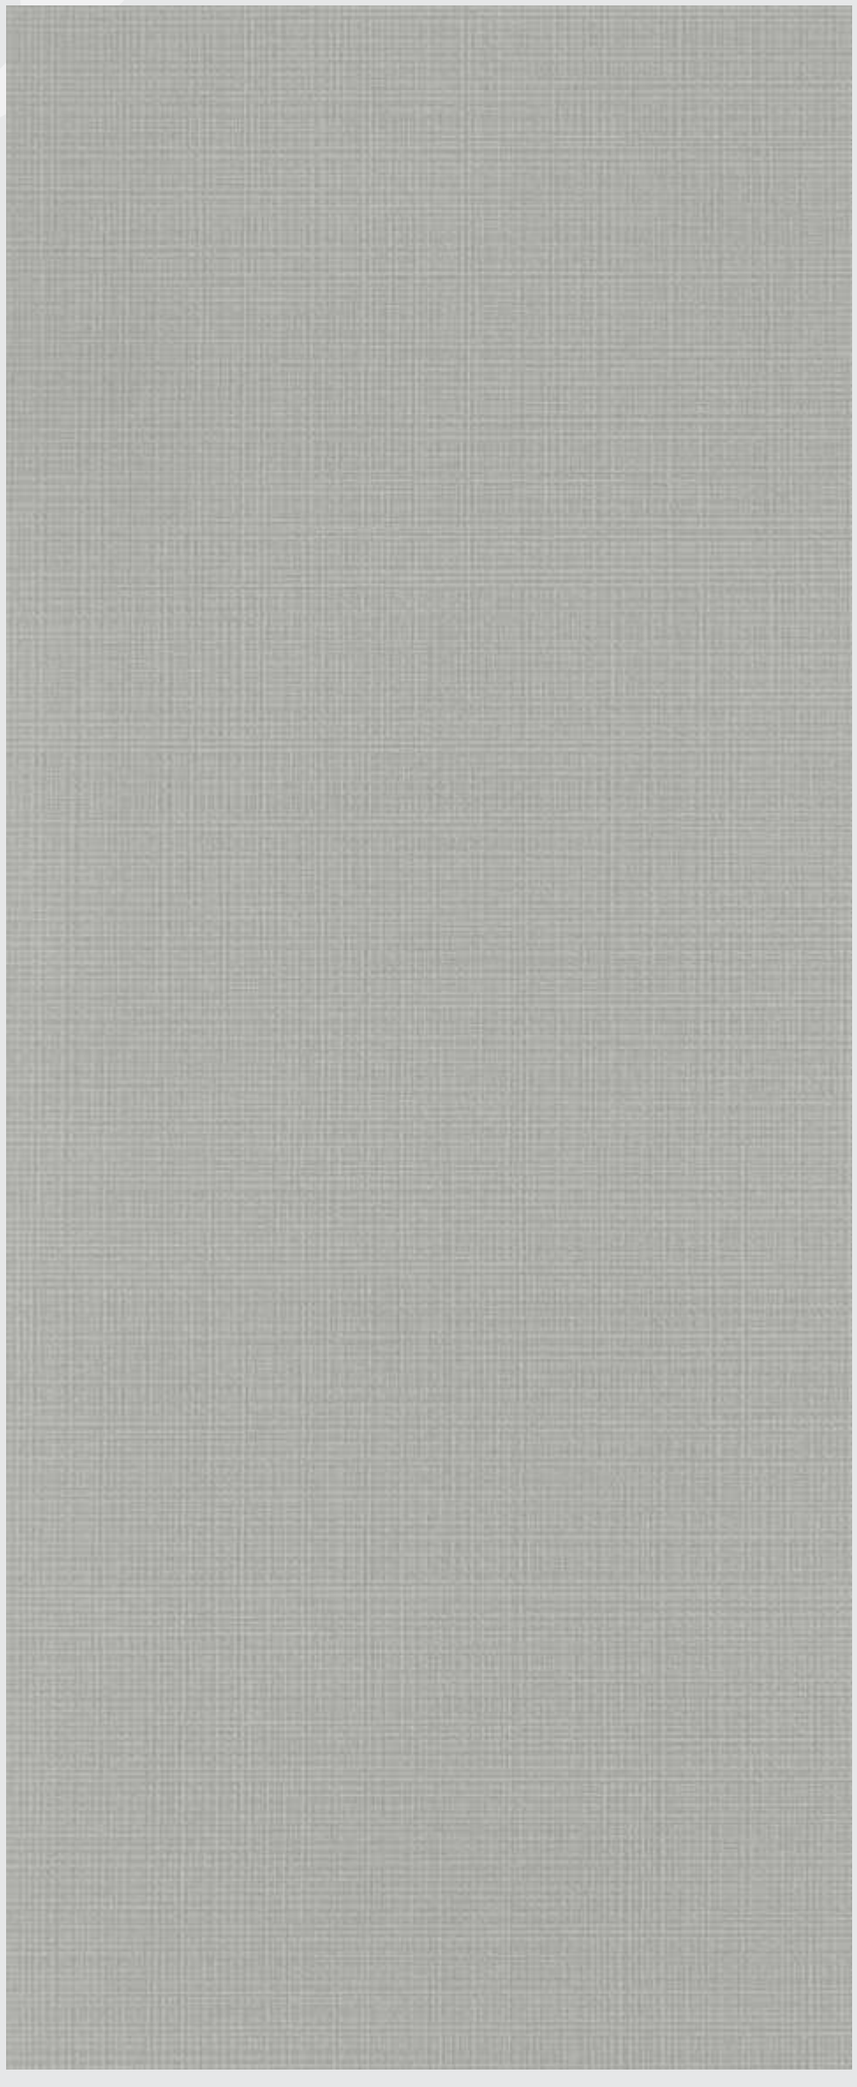

SF-347

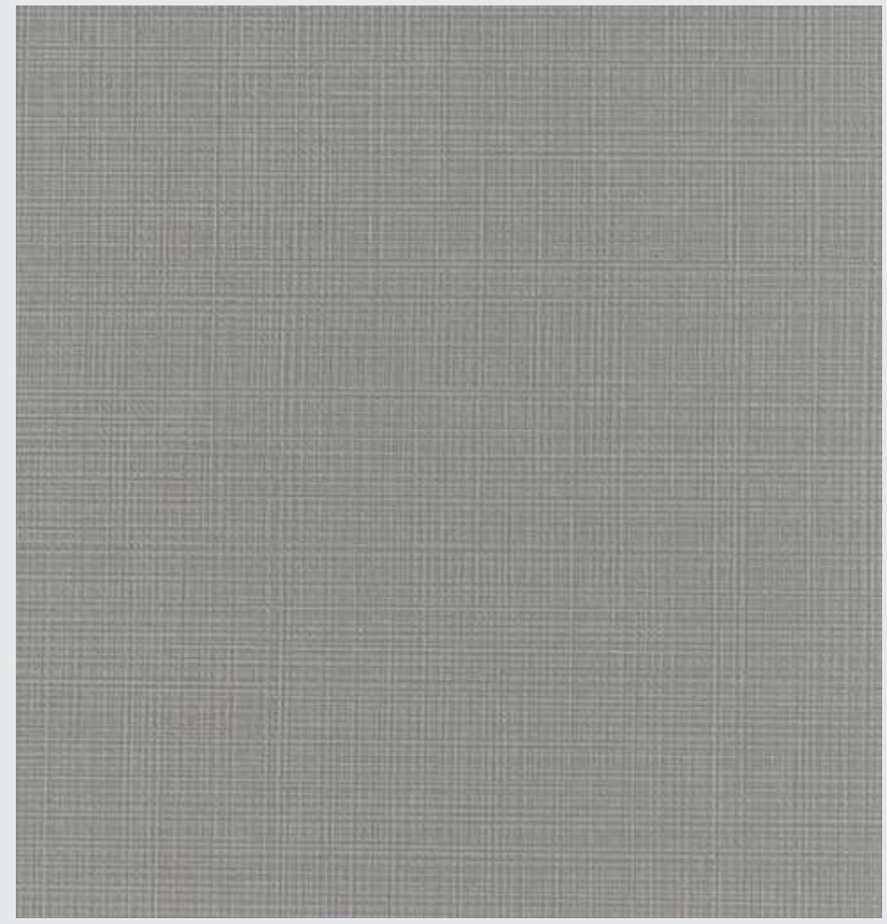

SF-345

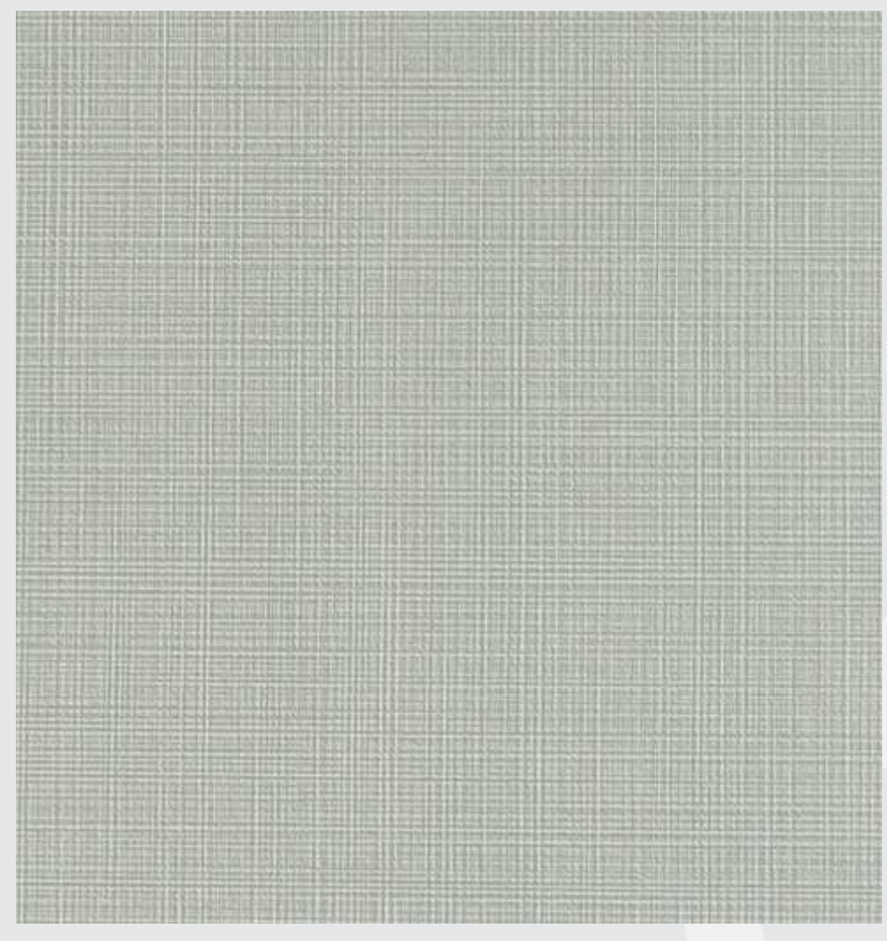

SF-346

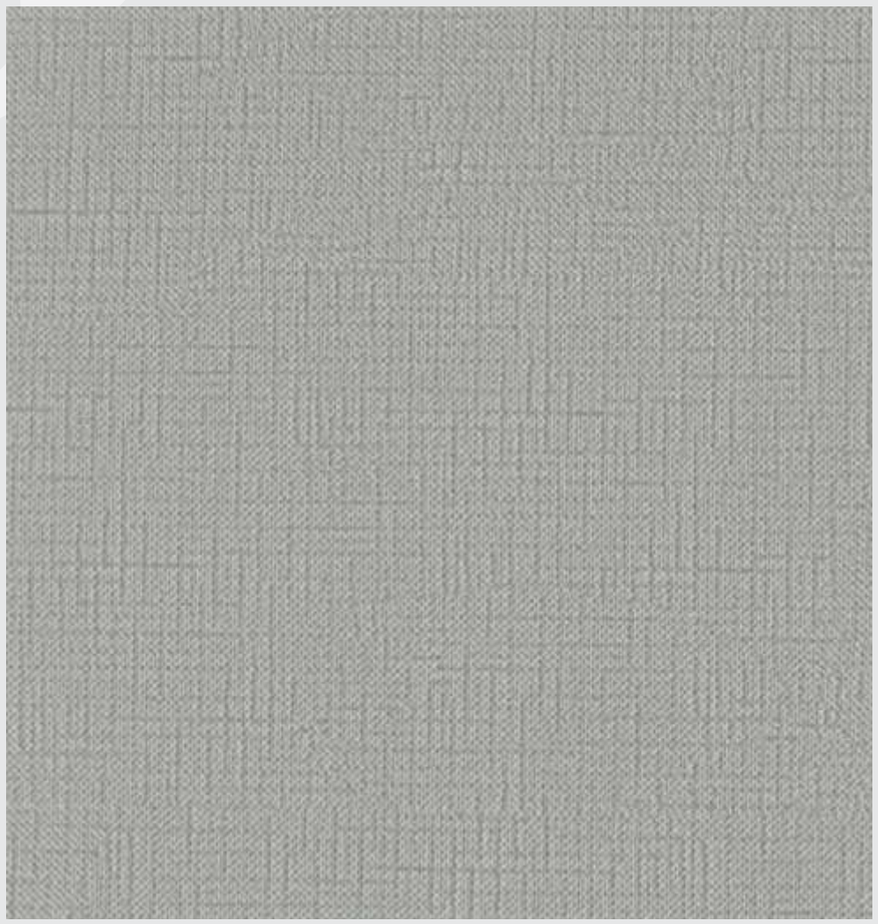

SF-340

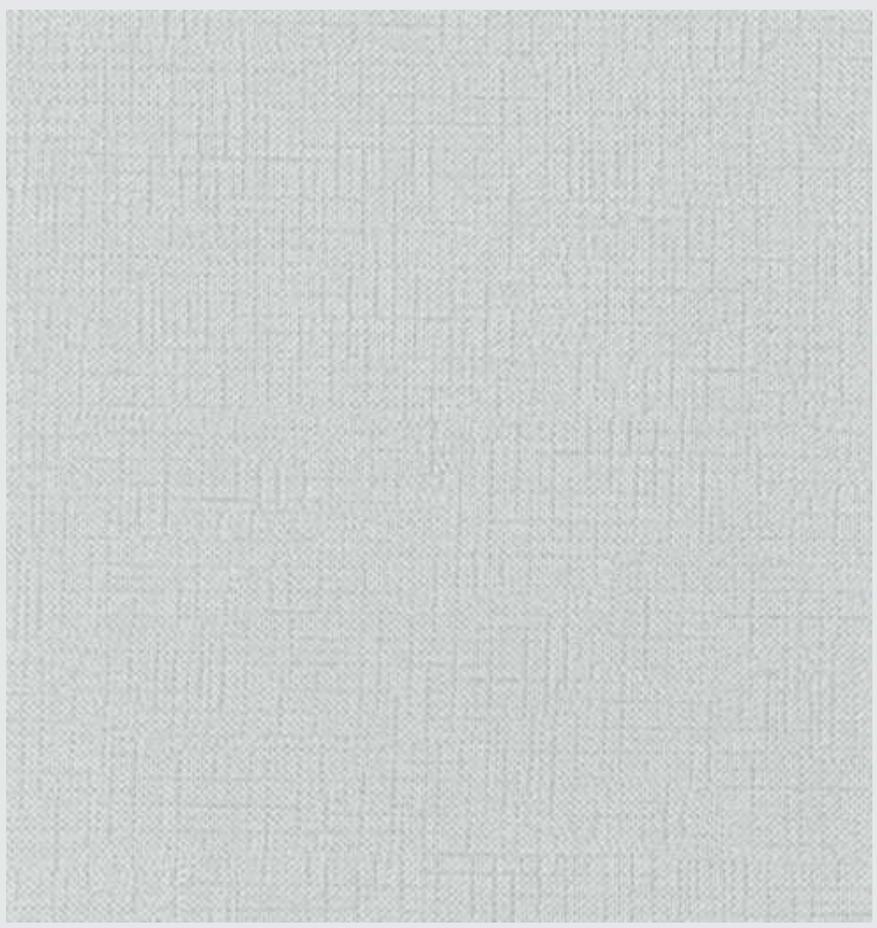

SF-339

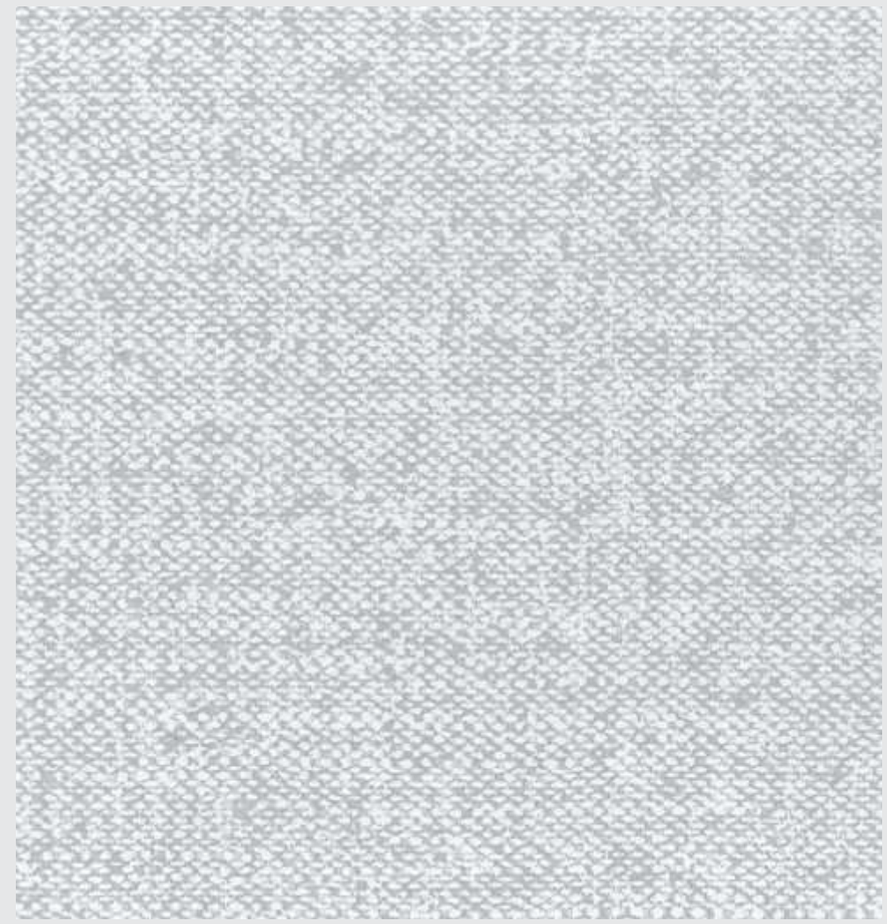

SF-311

SF-312

SF-343

SF-344

SF-336

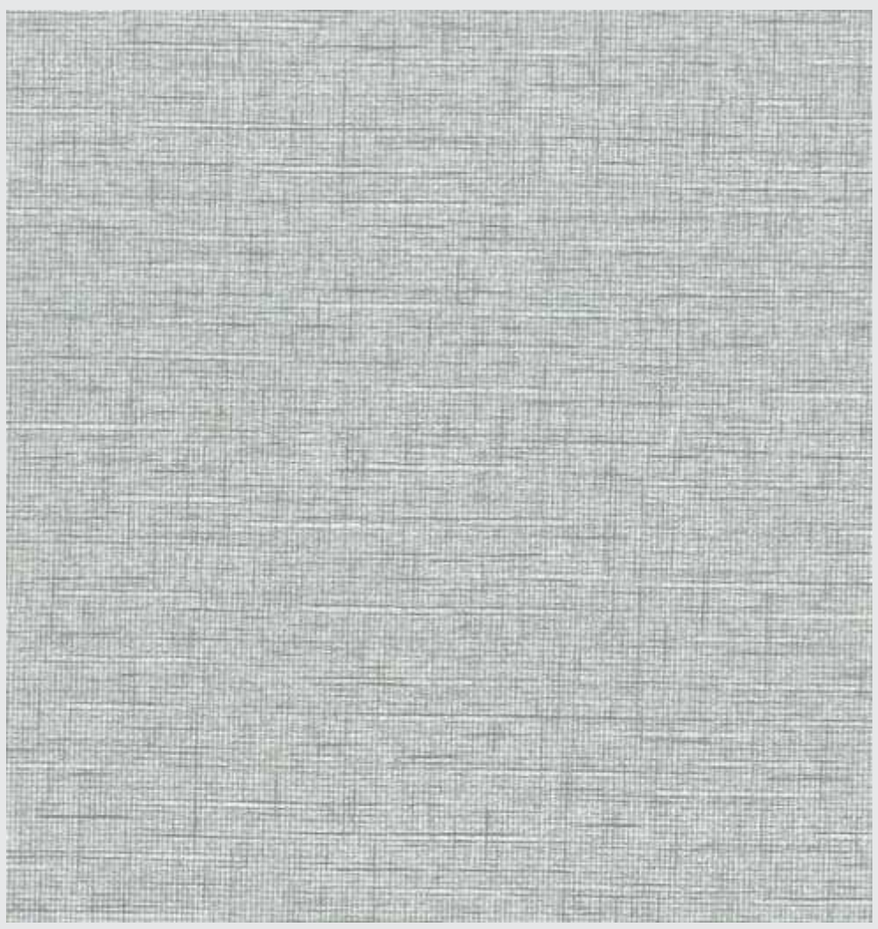

SF-337

Cotton
Laminate

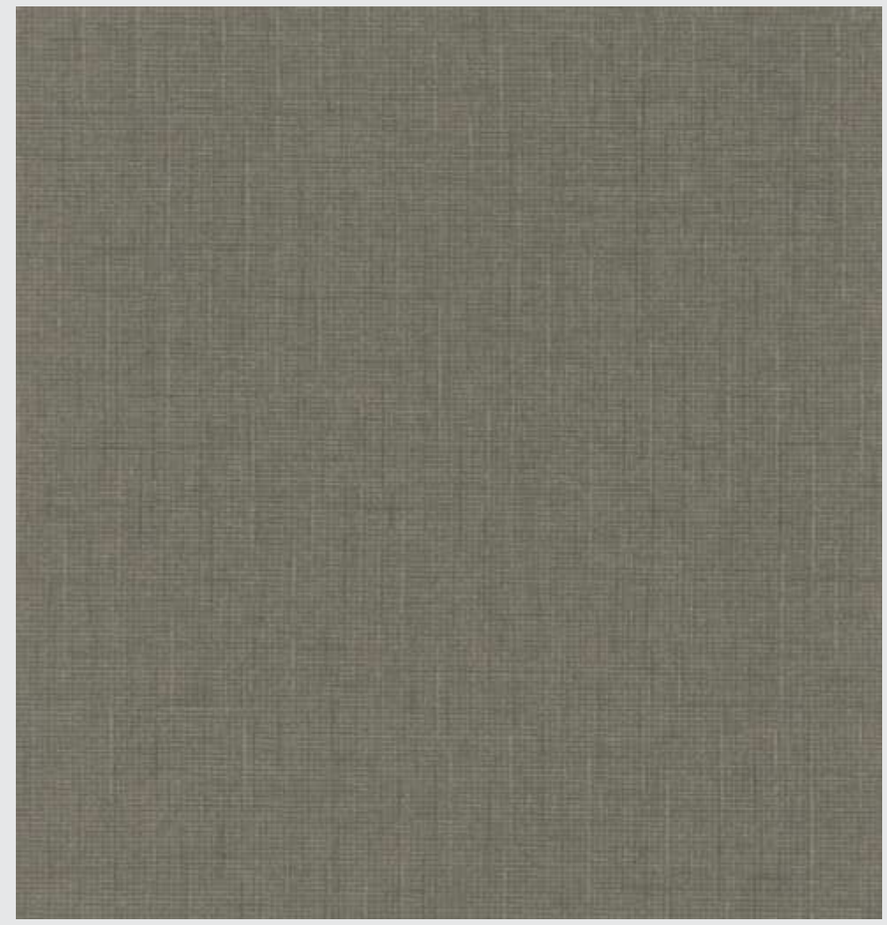

SF-342

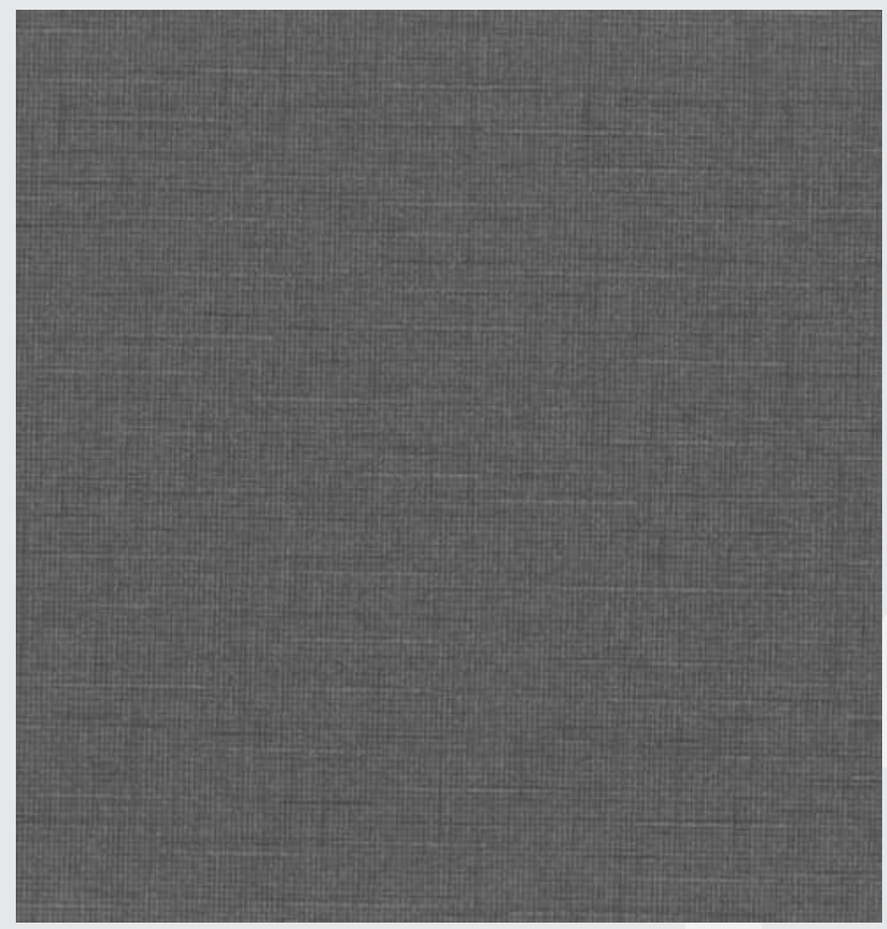

SF-341

SF-308

SF-310

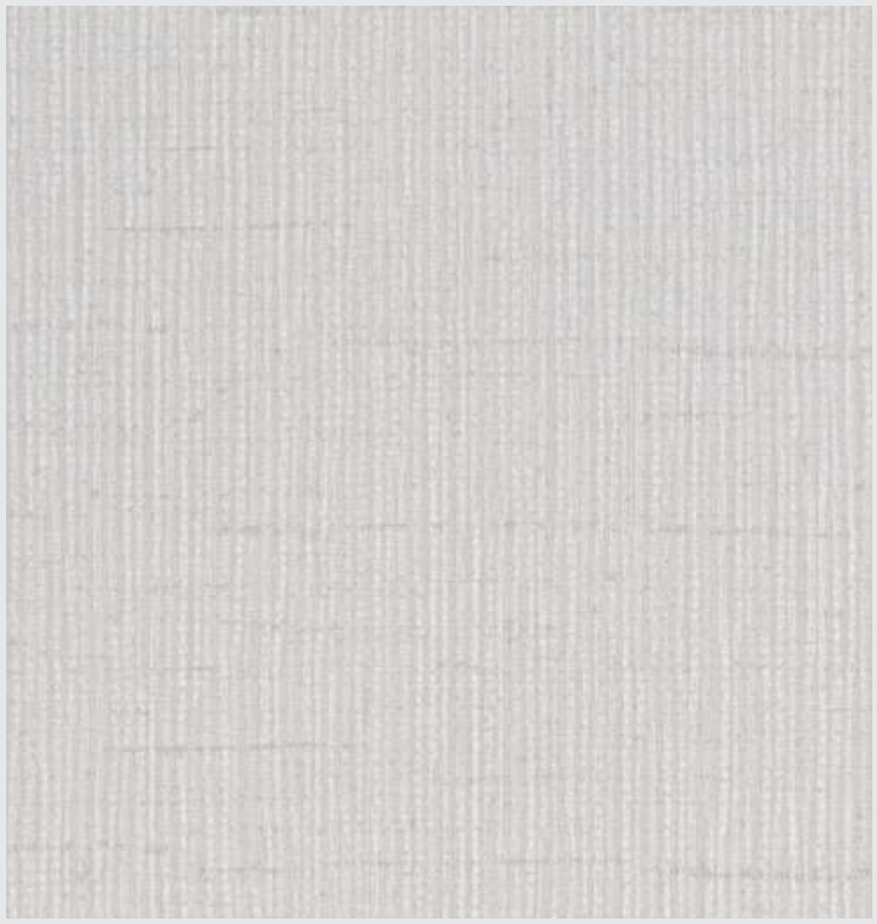

SF-348

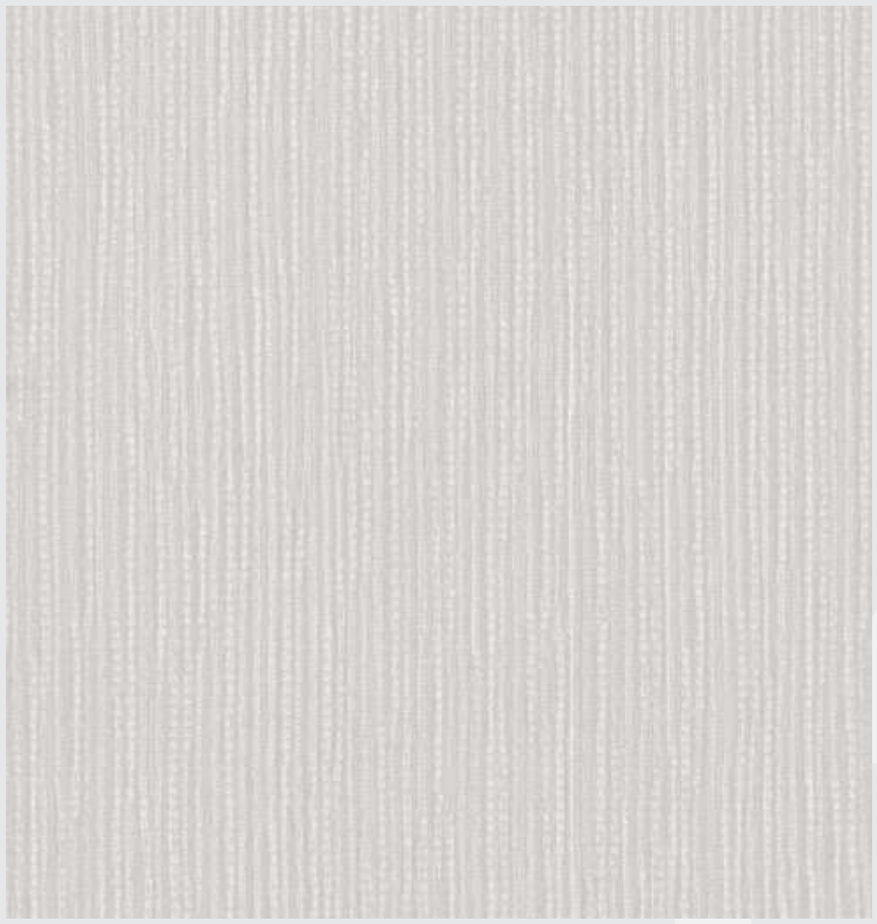

SF-349

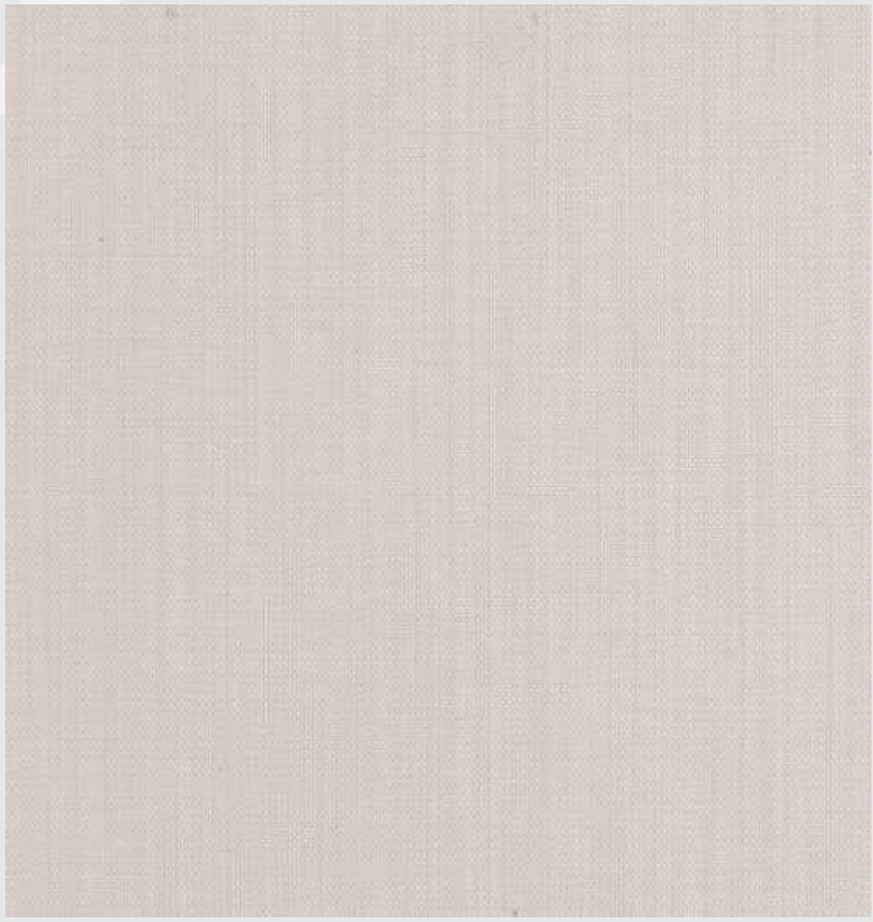

SF-351

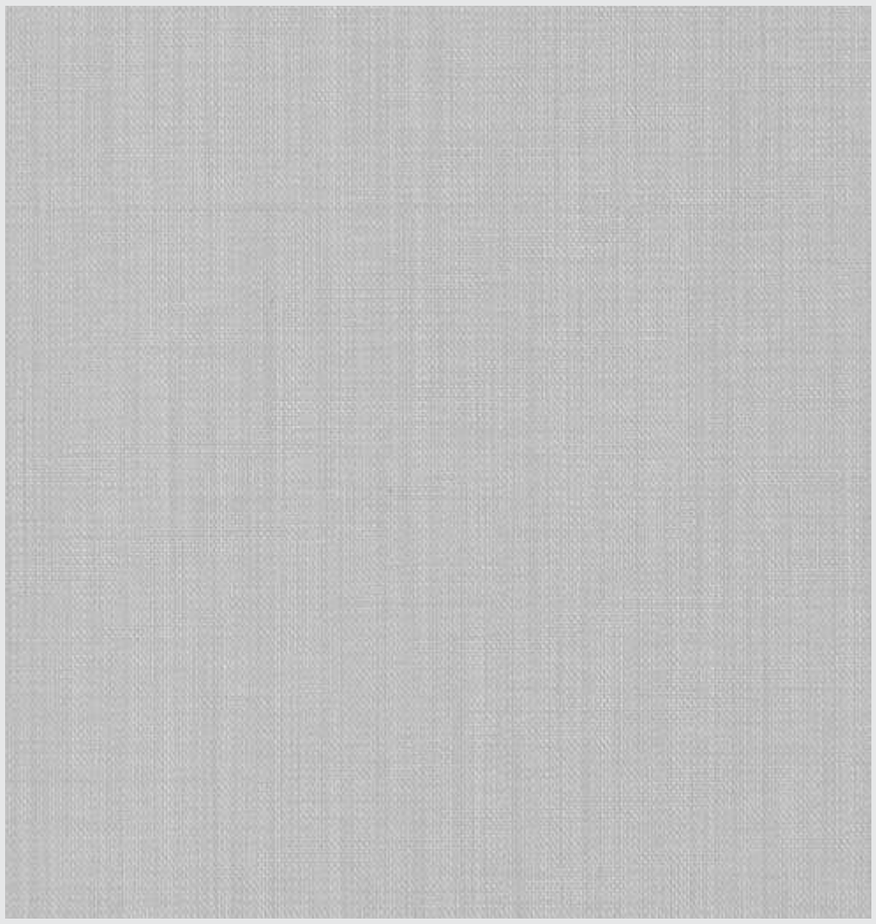

SF-350

Cotton
Laminate

TECHNICAL SPECIFICATIONS

PROPERTIES	SPECIFIED VALUES AS PER IS:20146-1995, TYPE S, HGS	COTTON CONFORMS	SPECIFIED VALUES AS PER IS:20146-1995, TYPE S, HGS	COTTON CONFORMS
Resistance to surface wear	350 (Revolutions)	✓	350 (Revolutions)	✓
Resistance to immersion in boiling water - Mass increase (%) - Thickness increase (%) - Appearance	10.0 (Maximum) 11.8 (Maximum) Not worse than 4	✓	10.0 (Maximum) 11.8 (Maximum) Not worse than 4	✓
Resistance to dry heat (180°C)	Not worse than 4	✓	Not worse than 4	✓
Dimensional stability at deviated temperature - Longitudinal (%) - Transverse (%)	0.55 (Maximum) 1.025 (Maximum)	✓	0.44 (Maximum) 0.86 (Maximum)	✓
Dimensional stability at 20°C - Longitudinal (%) - Transverse (%)	0.375 (Maximum) 0.60 (Maximum)	✓	0.31 (Maximum) 0.49 (Maximum)	✓
Resistance to impact by small diameter ball	20 N (Minimum)	✓	20 N (Minimum)	✓
Resistance to cracking	Not worse than 4	✓	Not worse than 4	✓
Resistance to scratching	2 N (Minimum)	✓	2 N (Minimum)	✓
Resistance to staining	Not worse than 5	✓	Not worse than 5	✓
Resistance to color change (wood standards) - In Xenon arc light - In enclosed carbon arc light	Not worse than 6 Not worse than 5	✓	Not worse than 6 Not worse than 5	✓
Resistance to cigarette burns	Not worse than 3	✓	Not worse than 3	✓
Resistance to steam	Not worse than 4	✓	Not worse than 4	✓
Appearance	Should be free from foreign particles	✓	Should be free from foreign particles	✓

Grades : General and fire retardant [FR]
Types : Standard, post forming, compact, cabinet liners, backer
Size : 2440x1220 mm [8'x4']

NEROLAM Highlights :
- Design from genuine imported base paper
- Manufactured using best quality kraft paper
- Use of best chemical raw materials for better flexibility & durability

Care & Maintenance: Cleaning should be carried out with a soft moist cloth and warm soap solution. Do not use detergents containing abrasive particles or excess soda.

Disclaimer: Customers are advised to reconfirm selected laminate when placing orders as our liability does not include claims arising from sample chip pasting error. Samples presented are indicative of color, pattern and surface finish but not of actual thicknesses. All metallic pattern series are recommended for vertical application only.

Limited Warranty: COTTON Warrants that its products are reasonably free from manufacturing defects. The products when properly used, well comply with normal deviation to related manufacturing specifications. This warranty shall be limited only to the original buyer for a period of care. The company is not liable for any improper use and/ or any alteration to the laminates. It is recommended that the products be inspected prior to installation and our liability will be limited to the extent of the cost of the products only. CROTTON are used for various applications without the possibility of control over the manufacturing of the finished products. The company does not assume obligations or liabilities arising from the furnishing, sale, installation, repair, use or subsequent sale of any product to any person or entity.



Do not use nail and hammer while cutting corner, grew, angle or design.



Only use a drill to cut such corners, grew, angle or design.